

START Flat Panel LED UGR19 600x600


START Panel Flat UGR19 600x600 3500Lm 840

0047227



Productkenmerken

- Edge lit LED flat panel with low glare (UGR<19). Low Flicker, 35 W, Neutral White, 4000 K, 3500 lumens, 100 lm/W, Average lifespan: 120.000Hrs, prismatic diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 9.5 x 595 x 595 mm

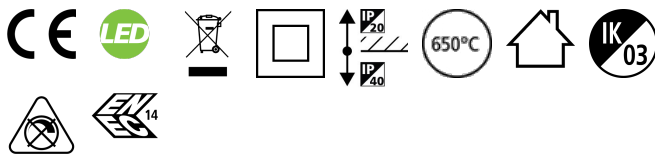


PRODUCTOVERZICHT

Productnaam	START Panel Flat UGR19 600x600 3500Lm 840
Technologie	LED
Behuizing	Aluminium
Montage	Ceiling recessed mounting, Ceiling surface mounting, Gependeld
Omgeving	Interior
Algemene toepassing	Onderwijs, Kantoor
ETIM klasse	Ceiling-/wall luminaire
E-nummer FI	4276948
Garantie	5 years
Lumenstroom armatuur (lm)	3,500
Efficiëntie armatuur lm/W	100
Kleurtemperatuur (K)	4000
Lichtkleur	Neutral White
CRI (Ra)	80
Initiële kleurvariatie (SDCM)	SDCM5
Bundel breedte ()	90
Luminantiecontrole	< 19
Fotobiologische Risicogroep	RG0
Totaal energieverbruik (W)	35
Elektrische beschermingsklasse	Klasse II
Type ballast	LED driver constant current
Dimbaar	Nee
Flikkerratio (%)	Ultra low (5% or less)
Kleur behuizing	RAL 9003 - Signal white
IP waarde	IP40/20
IK waarde	IK03
EAN code	5410288472270

FOTOMETRISCHE GEGEVENS

START Flat PanelLED UGR19 600x600

START Panel Flat UGR19 600x600 3500Lm 840
0047227

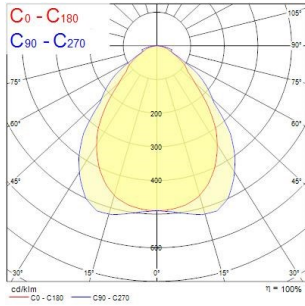

Distance [m]	Cone diameter [m]	E0° [lx]	E15° [lx]	E30° [lx]	E45° [lx]	E60° [lx]	E75° [lx]	E90° [lx]
0.5	0.95 0.92	676	439	194	109	62	37	23
1.0	1.92 1.64	169	109	49	28	16	10	6
1.5	2.89 2.46	75	49	22	13	7	4	3
2.0	3.85 3.28	42	28	12	7	4	2	1
2.5	4.81 4.11	27	18	8	5	3	1	0.7
3.0	5.77 4.93	18	12	5	3	2	1	0.5

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 78.9°)
— C90 - C270 (Half beam angle: 87.8°)

TECHNISCHE TEKENINGS

