


Junistar ECO Isosafe White 550lm 3000K Ra 98 Trailing edge dimming

Article code: **905214**
 EAN: 7021989052142



Light technic

Type of light source:	LED (not exchangeable)
Wattage:	6W
System wattage:	7W
Luminous flux:	550lm
Efficacy:	79 lm/W
Voltage:	230V
Colour temperature:	3000K
Colour rendering (CRI):	Ra 98
MacAdams factor:	SDCM: 2
Lifetime:	L80/B20>50,000
Light distribution:	Direct
Optic:	Glass Clear
Beam angle:	42°




Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class:	Class II SELV
Ingress protection rating:	IP44
Ta nominal:	Ta=25°C

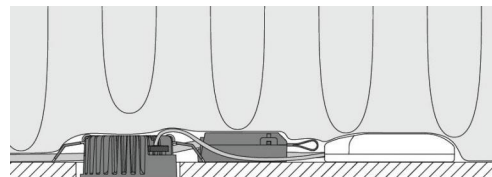

Energy and approvals

Energy class:	A++
Approval:	CE

Materials and finish

Housing:	Aluminium
Colour:	White (RAL 9003)
Optics:	Glass

Mounting/Connection


Mounting:	Recessed, Indoor
Cable entry:	Screwless terminal block
Max. luminaires per circuit breaker:	B10: 105, B16: 168, C10: 105, C16: 168

Dimensions (mm)

Length (mm) L:	90
Width (mm) W:	90
Height (mm) H:	40
Diameter (mm) D:	90
Cut-out (mm):	83
Weight (kg) brutto/netto:	0.361 / 0.361

Packaging

Packing dimensions (mm):	122 x 121 x 95
Number per pack:	8

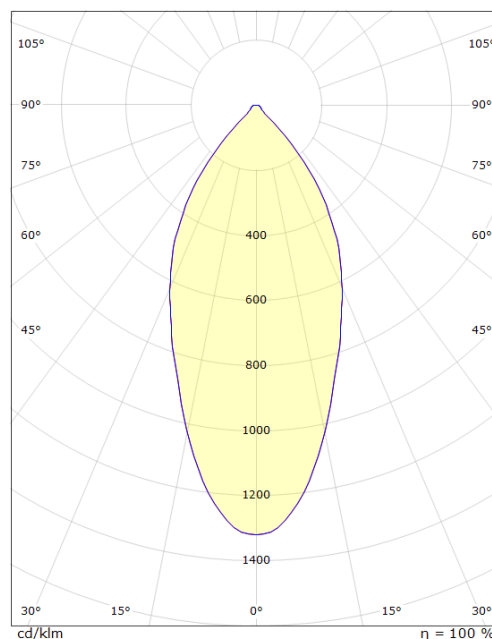

7 0 2 1 9 8 9 0 5 2 1 4 2